

100G CFP Coherent 3000 km (OM8568XX100)

# Databrief

---

## Product Features


- Transmission reach beyond 3000 km for 100G over SMF without inline chromatic dispersion compensation
- Hot-pluggable
- Supports PM-DQPSK (100G) and PM-QPSK (100G) modulation
- Supports 50 GHz channel spacing
- Supports SD-FEC
- Supports OTU4, compliant with OTL4.10/OTL4.4 interface
- Compliant with CFP MSA CFP Hardware Specification 1.4 with modifications
- Compliant with CFP MSA Management Interface Specification 2.6 with modifications
- Framed PRBS generator/checker on the host and network side interfaces
- SerDes PRBS generator/checker for per lane testing of host interface
- LC optical receptacle
- Operating case temperature: 0°C to 75°C
- Power consumption: 28 W



## 1. Application

The module is designed to be used on the host board of system integrators to support transmission over DWDM links in long-haul networks. As shown in Figure 1-1, it comprises of high-data lanes, a single reference clock for OTU4 hosts, a single 3.3 V power supply, an MDIO interface for module control and status report, and dedicated alarm and control pins.


Figure 1-1 100G line card block diagram with OM8568XX100 module

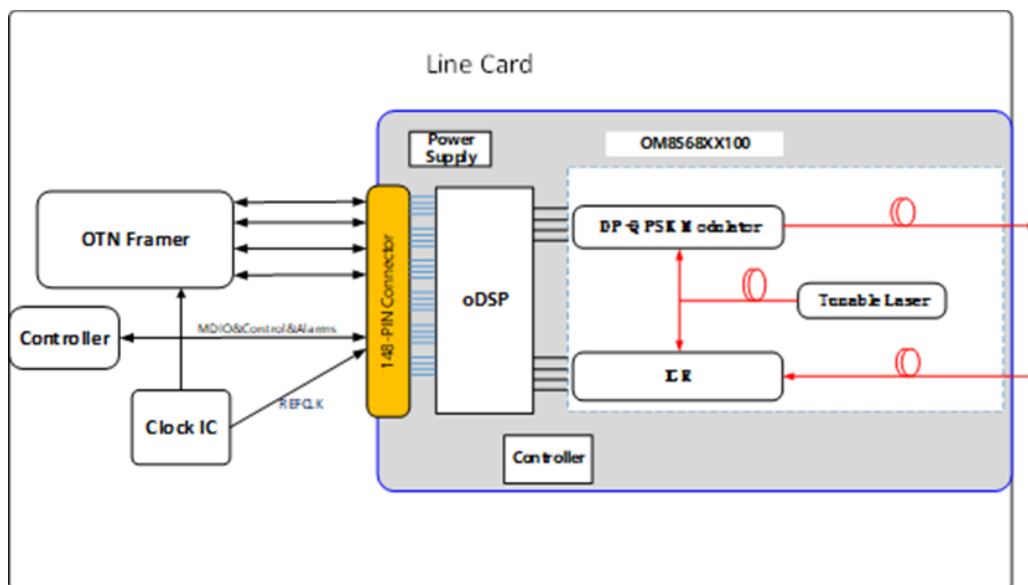

## 2. Description

The OM8568XX100 module uses a 148-pin OIF MSA connector for all electrical interfaces with the host card, whereas the optical interfaces on the line side are provided through the optical receptacles on the CFP. As depicted in Figure 2-1, the module can be portioned into four parts: oDSP, optical component, control unit and power block.

Figure 2-1 OM8568XX100 module block diagram

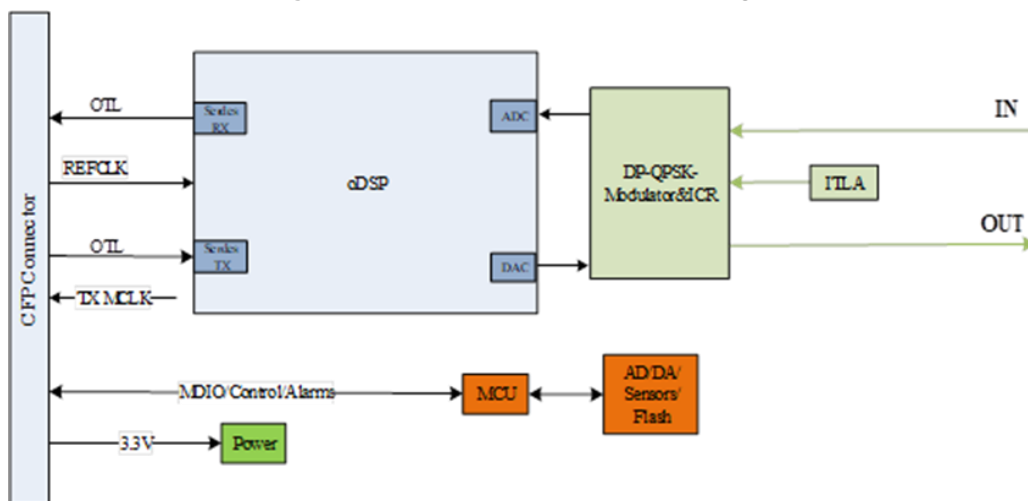


### 3. Mechanical Specifications

The CFP module is designed to be inserted into a host board with a railing system that includes a heat sink. The module is 144.75 mm x 75.00 mm x 13.60 mm in size and is mechanically compliant with the requirements detailed the CFP Hardware Specification rev.1.4 (with modifications, added heat dissipation holes).

A mechanical model is available from HiSilicon upon request.

Figure 3-1 Mechanical dimensions

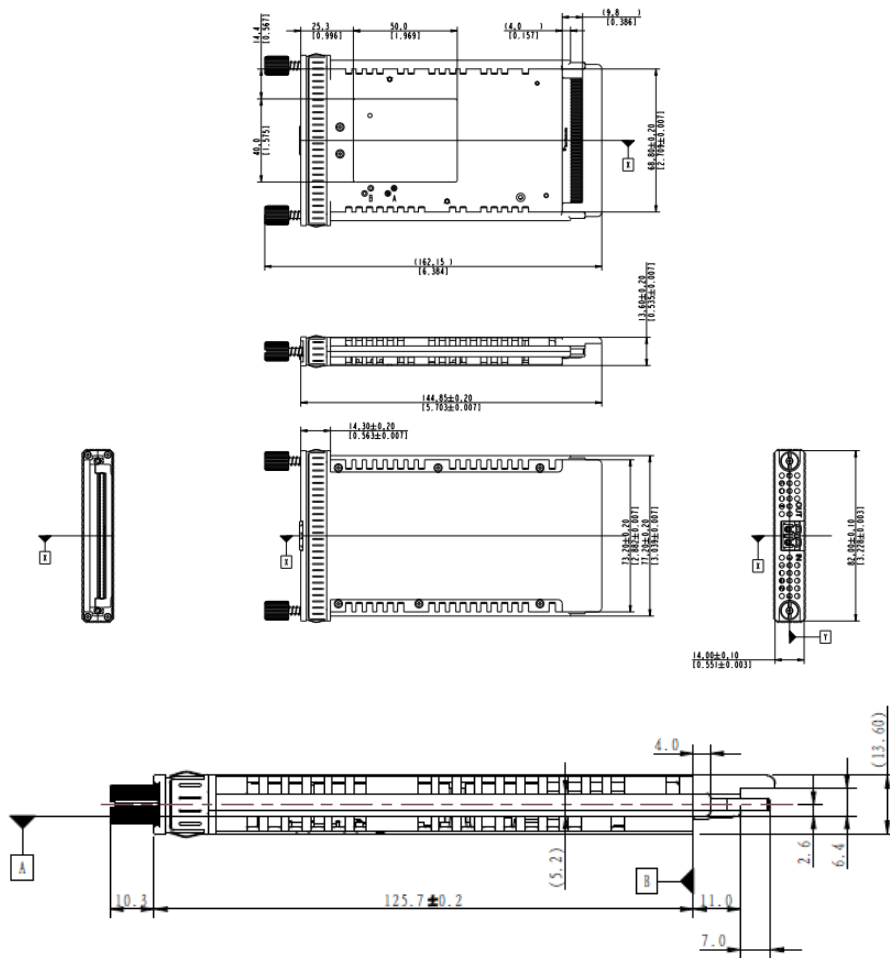


### 4. Ordering Information

Part Number	Description
OM8568XX100	100G, PM-DQPSK/PM-QPSK, Coherent CFP

**Copyright © HiSilicon Optoelectronics Co., Ltd. 2024. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of HiSilicon Optoelectronics Co., Ltd.

#### **Trademarks and Permissions**

 is a trademark of HiSilicon Optoelectronics Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

#### **Notice**

The purchased products, services and features are stipulated by the contract made between HiSilicon Optoelectronics Co., Ltd. and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.